



CF Bored Flange, Fixed

- Flange material: Stainless Steel 304/316L

DN	D	D0	D1	D2	D3	H	n	c
16	34	27.0	21.4	18.0	18.0	7.3	6	4.3
20	54	41.3	32.9	27.6	24.0	10.5	6	6.6
25	60	47.0	39.0	34.0	29.0	10.0	6	6.6
32	70	54.0	46.0	41.0	35.0	12.0	6	6.6
40	70	58.7	48.3	42.0	38.0	13.0	6	6.6
50	86	72.4	61.6	55.6	53.0	16.0	8	8.4
63	114	92.2	82.4	77.0	66.0	17.5	8	8.4
80	130	110.0	99.0	93.0	85.0	18.0	16	8.4
100	152	130.3	120.6	115.0	104.0	20.0	16	8.4
160	202	181.0	171.4	166.0	154.0	22.0	20	8.4
200	253	231.8	222.1	217.0	205.5	24.5	24	8.4
250	305	284.0	273.1	267.0	256.5	26.0	32	8.4


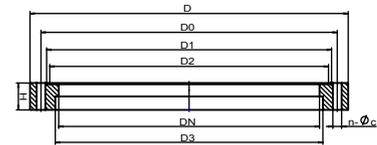


- The actual nominal diameter of DN40 is 35mm and that of DN160 is 150mm.

CF Bored Flange, Rotatable

- Flange: Stainless Steel 304/316L

DN	D	D0	D1,3	D2	D4	D5	H	n	c
16	34	27.0	21.4	18.5	18.0	18.0	7.3	6	4.3
20	54	41.3	32.9	25.0	27.6	24.0	10.5	6	6.6
25	60	47.0	39.0	30.0	34.0	29.0	10.0	6	6.6
32	70	54.0	46.0	39.0	41.0	35.0	12.0	6	6.6
40	70	58.7	48.3	39.0	42.2	38.0	13.0	6	6.6
50	86	72.4	61.6	56.0	55.6	53.0	16.0	8	8.4
63	114	92.2	82.5	71.0	77.0	66.0	17.5	8	8.4
80	130	110.0	99.0	87.0	93.0	85.0	18.0	16	8.4
100	152	130.3	120.6	109.0	115.0	104.0	20.0	16	8.4
160	202	181.0	171.4	160.0	166.0	154.0	22.0	20	8.4
200	253	231.8	222.1	208.0	217.0	206.0	24.5	24	8.4
250	305	284.0	273.1	262.0	267.0	256.5	26.0	32	8.4

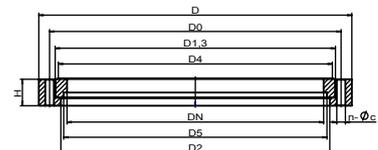

- The actual nominal diameter of DN40 is 35mm and that of DN160 is 150mm.